

### FIG 500 HIGH LIFT SAFETY VALVE

#### FEATURES & BENEFITS

The NABIC 500 is designed primarily for use on unvented hot water heating systems, where a high capacity, emergency steam relief capability is required. All wetted parts are manufactured from dezincification resistance materials. Designed and tested to BS EN ISO 4126 -1. WRAS approved (1 bar and above).

- Size Range: DN15 - DN65
- Resilient PTFE seating design with high degree of seat tightness
- Easy inspection and cleaning
- High discharge capacity
- Diaphragm protected parts
- Available with Viton seat design
- Padlock available (complies with M&E3)
- Pressure setting locked and sealed
- Drain plug fitted on DN32 and above



#### PRESSURE RATINGS & TEMPERATURE RANGE

MIN - MAX SET PRESSURE (bar)	MIN - MAX SET TEMPERATURE (°C)
DN15 to DN25 1.0 to 12.5	-20 to 195
DN32 to DN65 0.4 to 12.5	-20 to 195

#### MEDIUM

Hot water, steam, compressed air and inert gasses, CO<sub>2</sub> (to 20°C), ethylene glycol, potable water.

#### DIMENSIONS & WEIGHTS

SIZE DN	Rp BSP Inlet	Rp BSP Outlet	A (mm)	B (mm)	C (mm)	WEIGHTS (kg)
15	1/2"	3/4"	33	20	120	0.53
20	3/4"	1"	39	24	132	0.76
25	1"	1 1/4"	45	30	155	1.35
32	1 1/4"	1 1/2"	54	36	201	2.35
40	1 1/2"	2"	64	41	241	4.20
50	2"	2 1/2"	76	47	267	6.80
65	2 1/2"	3"	90	60	330	12.50

#### PIPE CONNECTIONS

Screwed female inlet and outlet connections. Outlet connection is one size larger than inlet connection. Threaded connections are 'Rp' parallel to BS EN 10226-1. NPT connections are available upon request.


#### PRODUCT TESTING

All valves are shell and seat tested (to confirm set pressure) before leaving the factory and all valves are supplied pre-set with a tamper proof seal. Pressure Test Certificate and Letters of Conformity available on request.

#### PART NAME & MATERIALS

ITEM NO.	PART NAME	MATERIAL
1	Thrust Washer	Brass, BS EN 12164 CW609N
2	Grubscrew	Steel
3	Test Lever	Brass, BS EN 1982 CC754S
4	Spring	Chrome Vanadium Alloy Steel, BS 2803 735 A50 HS (Stainless Steel, BS 2056 302S26 Opt)
5	Label	Yellow kapton
6	Spring Cover	Bronze, BS EN 1982 CC491K
7	Piston	Brass, BS EN 12164 CW609N
8	Diaphragm	Silicon Rubber
9	Seat Seal Holder	Bronze, BS EN 1982 CC491K / Brass BS EN 12164 CW602N (DZR)
10	Seat Seal	PTFE (Viton Opt)
11	Starlock Washer	Stainless Steel
12	Body	Bronze, BS EN 1982 CC491K
13	Lever Pin	Steel
14	Lead Seal (Not shown)	Lead
15	Adjusting Screw	Brass, BS EN 12164 CW609N
16	Spring Plate	Brass, BS EN 12164 CW609N
17	Spindle	Brass, BS EN 12164 CW721R
18	Seat Seal Retaining Plate	Bronze, BS EN 1982 CC491K / Brass BS EN 12164 CW602N (DZR)
19	O-Ring	Viton

#### DIMENSIONAL DRAWING

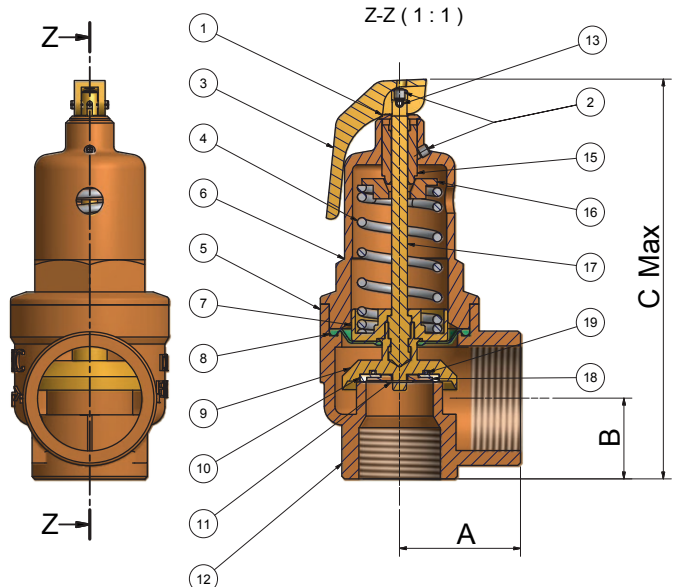

#### APPROVALS



FM 00311 EMS 553775



### DISCHARGE CAPABILITIES

The discharge capacity of a safety valve must be equal to or greater than the output of the boiler or system it is protecting. To ensure that the correct method of sizing is used, reference should be made to the relevant BS specification for the design of the boiler or system. Fig 500 capacities are tabulated below to assist selection.

AIR CAPACITY - 10% OVERPRESSURE (BS EN 4126-1)							
SET PRESSURE BAR	std. litres/sec (Kdr=0.479)						
	DN15	DN20	DN25	DN32	DN40	DN50	DN65
1.0	34	61	95	156	244	381	644
2.0	52	93	145	238	372	581	982
3.0	70	125	195	320	500	780	1319
4.0	88	157	245	401	628	980	1656
6.0	124	221	345	565	883	1379	2331
8.0	160	284	445	728	1139	1778	3006
10.0	196	348	545	892	1394	2178	3681
12.5	241	428	670	1096	1714	2677	4524

To convert to ft<sup>3</sup>/min multiply by 2.1.

STEAM - 10% OVERPRESSURE (BS 6759)							
SET PRESSURE BAR	Kg/hr (Kdr=0.479)						
	*DN15	DN20	DN25	DN32	DN40	DN50	DN65
1.0	93	166	259	425	664	1037	1752
2.0	142	253	395	647	1012	1580	2670
3.0	191	340	531	869	1359	2123	3588
4.0	240	427	667	1092	1707	2666	4506
6.0	338	600	938	1537	2402	3752	6341
8.0	436	774	1210	1981	3098	4838	8177
10.0	534	948	1482	2426	3793	5924	10013
12.5	657	1165	1821	2982	4663	7281	12307

To convert to lb/hr multiply by 2.2.

\* The minimum bore size permitted by BS specifications for steam and hot water boilers is 20mm.

Capacities given for the smaller sizes in the tables, are for applications outside the scope of these standards.

HOT WATER - UNVENTED SYSTEM - 10% OVERPRESSURE (BS EN 4126-1)							
SET PRESSURE BAR	kW (Kdr=0.479)						
	* DN15	DN20	DN25	DN32	DN40	DN50	DN65
1.0	59	104	162	266	416	650	1098
2.0	89	158	248	405	634	990	1673
3.0	120	213	333	545	852	1330	2248
4.0	151	267	418	684	1070	1670	2824
6.0	212	376	588	963	1505	2351	3974
8.0	273	485	758	1242	1941	3032	5124
10.0	335	594	929	1520	2377	3712	6275
12.5	411	730	1141	1869	2922	4563	7713

To convert to Btu/hr multiply by 3,400

The capacities tabulated are for unvented (pressurised or sealed) heating systems.

For vented systems we generally recommend the use of Fig 542 Safety Relief Valves.

Fig 500 Safety Valves can be used for high output systems where its greater discharge capacity is advantageous.

For unvented hot water supply systems, Fig 500T Combined Pressure & Temperature Relief Valves should be used.

WATER - UNVENTED SYSTEM - 10% OVERPRESSURE (BS EN 4126-1)							
SET PRESSURE BAR	kg/min water (Kdr=0.479)						
	DN15	DN20	DN25	DN32	DN40	DN50	DN65
1.0	75	134	209	343	536	837	1414
2.0	107	189	296	485	758	1183	2000
3.0	131	232	363	594	928	1449	2450
4.0	151	268	419	685	1072	1674	2829
6.0	185	328	513	840	1313	2050	3465
8.0	213	379	592	969	1516	2367	4001
10.0	239	423	662	1084	1695	2646	4473
12.5	267	473	740	1212	1895	2959	5001

In the above tables, discharge capacities have been calculated in accordance with BS EN 4126-1 & BS 6759, using a derated coefficient of discharge (Kdr) 0.479, approved by AOTC.

# NABIC®

46-48 WILBURY WAY, HITCHIN, HERTFORDSHIRE, SG4 0UD  
 Tel: +44 (0) 1462 443 278 Fax: +44 (0) 1462 443 127  
 E-mail: [nabicsales@cranebsu.com](mailto:nabicsales@cranebsu.com) Web: [www.nabicvalves.com](http://www.nabicvalves.com)

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. NABIC assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

N Fig. 500  
0819

## OUR GENIUS IS VALVES

**CRANE** BUILDING SERVICES & UTILITIES

[www.cranebsu.com](http://www.cranebsu.com)



View online, on mobile and on tablet  
[www.nabicvalves.com](http://www.nabicvalves.com)